
RETURN TO
COUNTY SURVEYOR,
LOS ANGELES.

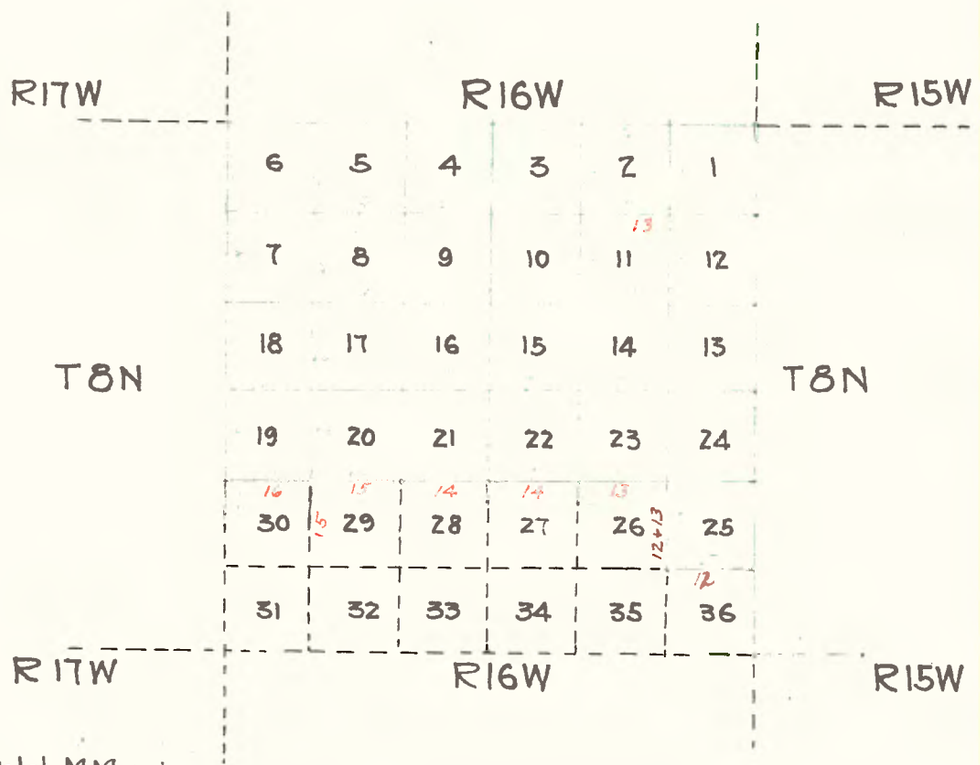

Ralph M. Morris

Some Lines rerun by Geo. W. Pearson 1901.

1854

NOTE. These notes were copied from, photographic copies of the original field notes owned by Wilkie Woodard -- They have not been compared.

Exterior Lines

T 8 N, R 16 W, S. B. M.

Between Sections 6 and 31. Var 14° 12' E.

5 00 To hill bearing N & S.
37 50 To steep hills.
40 00 Set a post charred and chalked for the ¼ sec corner and raised a mound with trench and pits per instructions.
42 00 Enter scattering Pine.
80 00 Set a post charred, chalked and notched and established the corner to Tps 7 and 8 North, Rs 15 and 16 West and raised a mound with trench and pits as per instructions, from which
A Pine 14 ins. dia. bears S. 9° W. 248 lks. distant.
This mound is on the N side of a steep ravine 80 ft deep.
It is impossible to run along the west boundary of T 7 N, R 15 W, on account of mountains.
Land 2nd rate.

- - - - - - - - - - - - - -

Between Ranges 15 and 16 West, Township 8 North.

From the corner to Townships 7 and 8 North, Ranges 15 and 16 West, I run
NORTH along the E boundary of Section 36. Var. 14° 13' E.

20 00 To a ravine, course N. 45° E.
34 00 Cross the same.
40 00 Set a post charred and chalked for the ¼ sec corner and raised a mound with trench and pits per instructions.
45 00 Leave scattering timber.
77 00 Leave hills for plain.
80 00 Set a post charred, chalked and notched for the corner to sections 25, 36, 30 and 31 and raised a mound with trench and pits per instructions. Land 2nd rate and hilly.

- - - - - - - - - - - - - -

NORTH on the E boundary of Section 25. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions
44 50 To Road to Tejon Fort course N. 68° 30' W.
80 00 Set a post charred, chalked and notched for the corner to sections 24, 25, 19 and 30, and raised a mound with trench and pits as per instructions. Land 2nd rate and level.

- - - - - - - - - - - - - -

NORTH on the E boundary of Section 24. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.
80 00 Set a post charred, chalked and notched for the corner to sections 13, 24, 18 and 19 and raised a mound with trench and pits as per instructions. Land 2nd rate and level.

- - - - - - - - - - - - - -

NORTH on the E boundary of Section 13. Var. 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
80 00 Set a post charred, chalked and notched for the corner to sections 12, 13, 7 and 18 and raised a mound with trench and pits as per instructions. Land 2nd rate and level.

- - - - - - - - - - - - - -

NORTH on the E boundary of Section 12. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 1, 12, 6 and 7, and raised a mound with trench and pitsas per instructions. Land 2nd rate level with some Palmetto.

- - - - - - - - - - - - - - -

NORTH on the E boundary of Section 1. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound.

80 00 To a point for corner to Townships 8 and 9 North, Ranges 15 and 16 West. Set a post charred, chalked and notched and raised a mound with trench and pits as per instructions.
Land level and 2nd rate.

- -

Between Townships 8 and 9 North, Range 16 West.

As the South Boundary of Township 8 North, Range 16 West, is not run on account of the mountains, I commence at the corner to Tps 8 and 9 North, Ranges 15 and 16 West and run

WEST between Sections 1 and 36. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 1, 2, 35 and 36 and raised a mound with trench and pits as per instructions. Land 2nd rate and level with some Palmetto.

- - - - - - - - - - - - - - -

WEST between Sections 2 and 35. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 2, 3, 34 and 35 and raised a mound with trench and pits per instructions. Land 2nd rate and level with some Palmetto.

- - - - - - - - - - - - - - -

WEST between Sections 3 and 34. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 3, 4, 33 and 34 and raised a mound with trench and pits per instructions. Land 2nd rate and level with some Palmetto.

- - - - - - - - - - - - - - -

WEST between Sections 4 and 33. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 4, 5, 32 and 33 and raised a mound with trench and pits per instructions. Land 2nd rate and level with some Palmetto.

- - - - - - - - - - - - - - -

WEST between Sections 5 and 32. Var 14° 13' E.

8 00 Leave Palmetto.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trencg and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 5, 6, 31 and 32 and raised a mound with trench and pits as per instructions. Land 2nd rate and level.

- - - - - - - - - - - - - - -

WEST between Sections 6 and 31. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
80 00 To a point for corner to Townships 8 and 9 North, Ranges 16 and 17 West. Set a post charred, chalked and notched and raised a mound with trench and pits per instructions.
Land 2nd rate and level.

- - - - - - - - - - - - - -

Between Ranges 16 and 17 West, Township 8 North.

From the corner to Townships 8 and 9 North, Ranges 16 and 17 West, I run
SOUTH along the EAST boundary of Section 1. Var 14° 13' E.

40 00 Set post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
80 00 Set a post charred, chalked and notched for the corner to sections 1, 12, 6 and 7 and raised a mound with trench and pits as per instructions. Land 2nd rate level and open.

- - - - - - - - - - - - - -

SOUTH on E boundary of Section 12. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
80 00 Set a post charred, chalked and notched for the corner to sections 12, 13, 7 and 18 and raised a mound with trench and pits as per instructions. Land 2nd rate and slightly ascending to the North.

- - - - - - - - - - - - - -

SOUTH on the E boundary of Section 13. Var 14° 13' E.
40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
45 60 John Philburn's house bears S. 21° E. 15 chs. distant.
75 00 To Road to Fort Tejon course N. 15° W.
80 00 Set a post charred, chalked and notched for the corner to sections 13, 24, 18 and 19 and raised a mound with trench and pits per instructions. Land good 2nd rate and ascending.

& & & - - - - - - - - - - -

SOUTH on the E boundary of Section 24. Var 14° 13' E.
2 00 Enter steep hills.
18 00 Leave hills for valley.
40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
47 50 Run over hills. (Isolated)
60 00 Leave hills for valley.
80 00 Set a post charred, chalked and notched for the corner to sections 24, 25, 19 and 30. and raised a mound with trench and pits per instructions. Land hill and valley and 2nd rate.

- - - - - - - - - - - - - -

SOUTH on the E boundary of Section 25. Var 14° 13' E.

2 00 Leave valley for steep hills.
16 00 To scattering Pine.
35 00 Set a post charred and chalked and raised a mound with trench and pits as per instructions on North side of ravine 80 feet deep at the foot of mountain.
Land 2nd rate generally.

I can survey no further South on account of steep mountains.

- - - - - - - - - - - - - -

T 8 N, R 16 W., S.B.M.

SUBDIVISIONS

Subdivision lines in T 8 N, R 16 W.

As the South boundary is not run on account of the mountains I commence survey at corner to sections 1, 2, 35 and 36, on the N boundary of the Township and run

SOUTH between sections 1 and 2. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred and chalked for the corner to sections 1, 2, 11 and 12, and raised a mound with trench and pits per instructions. Land 2nd rate and level, good grass some Palmetto.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 1 and 12. Var 14° 13' E.

40 00 Set post for temporary ¼ section corner.

79 82 Intersect the E boundary of the Township 65 lks S of the corner to sections 1 and 12 from which corner I run

WEST on a TRUE line between sections 1 and 12. Var 14° 41' E.

39 91 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.

79 82 The corner to sections 1, 2, 11 and 12.
Land 2nd rate and level growth as before.

- - - - - - - - - - - - - - -

SOUTH between sections 11 and 12. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 11, 12, 13 and 14, and raised a mound with trench and pits as per instructions. Land 2nd rate and level, grass and Palmetto.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 12 and 13.

10 00 Leave Palmetto for open plain.

40 00 Set a post for temporary ¼ section corner.

79 81 Intersect the E boundary of the Township 20 lks N of the corner to sections 12 and 13, from which corner I run

WEST on a TRUE line between sections 12 and 13. Var 14° 04' E.

39 99 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

79 81 The corner to sections 11, 12, 13 and 14.
Land 2nd rate and level.

- - - - - - - - - - - - - - -

SOUTH between sections 13 and 14. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 13, 14, 23 and 24, and raised a mound with trench and pits per instructions. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 13 and 24. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

79 25 Intersect the E boundary of the Township 45 lks. N of the corner to sections 13 and 24 from which corner I run

WEST on a TRUE line between sections 13 and 24. Var 13° 54' E.

39 62 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

79 25 The corner to sections 13, 14, 23 and 24.
Land 2nd rate and level, and good grass.

- - - - - - - - - - - - - - -

SOUTH between sections 23 and 24. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 23, 24, 25 and 26 and raised a mound with trench and pits as per instructions. Land 2nd rate and level with good grass.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 24 and 25. Var. 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

79 37 Intersect the E boundary of the Township 45 lks. N of the corner to sections 24 and 25 from which corner I run

WEST on a TRUE line between sections 24 and 25. Var 13° 54' E.

39 68 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.

79 37 The corner to sections 23, 24, 25 and 26.
Land gently rolling and 1st rate, good grass.

- - - - - - - - - - - - - - -

SOUTH between sections 25 and 26. Var 14° 13' E.

7 50 Cross Road to Fort Tejon, course N. 80° W.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

45 00 To mountains, course N. 60° W.

80 00 Set a post charred, chalked and notched for the corner to sections 25, 26, 35 and 36, and raised a mound with trench and pits as per instructions. Land 2nd rate, hill and plain.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 25 and 36. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

79 64 Intersect the E boundary of the Township 30 lks N of the corner to sections 25 and 36 from which corner I run

WEST on a TRUE line between sections 25 and 36. Var 14° E.

39 82 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

79 64 The corner to sections 25, 26, 35 and 36.
Land 2nd rate and very hilly.
It is impossible to survey further South on account of the steepness of the mountains.

- - - - - - - - - - - - - - -

SOUTH between sections 2 and 3. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 2, 3, 10 and 11 and raised a mound with trench and pits per instructions. Land level and good 2nd rate, grass and some Palmetto.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 2 and 11. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 00 Intersect N & S line 35 lks N of the corner to sections 1, 2, 11 and 12 from which corner I run

WEST on a TRUE line between sections 2 and 11. Var 13° 58' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 The corner to sections 2, 3, 10 and 11.
Land level and good 2nd rate, grass and Palmetto.

- - - - - - - - - - - - - - -

SOUTH between sections 10 and 11. Var 14° 13' E.

36 00 Leave Palmetto for open ground.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 10, 11, 14 and 15 and raised a mound with trench and pits per instructions. Land 2nd rate and level with good grass.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 11 and 14. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

79 86 Intersect N & S line 4 lks. S of the corner to sections 11, 12, 13 and 14 from which corner I run

WEST on a TRUE line between sections 11 and 14. Var 14° 15' E.

39 93 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

79 86 The corner to sections 10, 11, 14 and 15.
Land good 2nd rate and level with fine grass.

- - - - - - - - - - - - - -

SOUTH between sections 14 and 15. Var 14° 13' E.

40 00 Set a post charred and chalked for ½ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for corner to sections 14, 15, 22 and 23 and raised a mound with trench and pits as per instructions. Land good 2nd rate level with good grass.

- - - - - - - - - - - - - -

EAST on a RANDOM line between sections 14 and 23. Var 14° 13' E.

40 00 Set post for temporary ½ section corner.

79 80 Intersect N & S line 35 lks. N of the corner to sections 13, 14, 23 and 24 from which corner I run

WEST on a TRUE line between sections 14 and 23. Var 13° 58' E.

39 90 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

79 80 The corner to sections 14, 15, 22 and 23.
Land good 2nd rate and level. Fine grass.

- - - - - - - - - - - - - -

SOUTH between sections 22 and 23. Var 14° 13' E.

40 00 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

63 00 Cross Road to Fort Tejon, course N. 70° W.

70 00 To hills.

80 00 Set a post charred, chalked and notched for the corner to sections 22, 23, 26 and 27 and raised a mound with trench and pits per instructions. Land mostly level, good 2nd rate with good grass.

- - - - - - - - - - - - - -

EAST on a RANDOM line between sections 23 and 26. Var 14° 13' E.

40 00 Set a post for temporary ½ section corner.

49 00 Cross Road to Fort Tejon, course N. 50° W.

80 20 Intersect N & S line 15 lks. N of the corner to sections 23, 24, 25 and 26 from which corner I run

WEST on a TRUE line between sections 23 and 26. Var 14° 07' E.

40 10 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

80 20 The corner to sections 22, 23, 26 and 27.
Land 1st rate and hilly with good grass.

- - - - - - - - - - - - - -

SOUTH between sections 26 and 27. Var 14° 13' E.

5 00 To foot of steep mountain, course N. 80° W.

14 00 To a Cedar 8 ins. dia. marked as instructed.
I can proceed no further South on account of the steepness of the mountains. Land good 2nd rate and good grass.

- - - - - - - - - - - - - -

SOUTH between sections 3 and 4. Var 14° 13' E.

40 00 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 3, 4, 9 and 10 and raised a mound with trench and pits per instructions. Land 2nd rate and level with some grass and Palmetto.

- - - - - - - - - - - - - -

EAST on a RANDOM line between sections 3 and 10. Var 14° 13' E

40 00 Set a post for temporary ½ section corner.

80 25 Intersect N & S line 15 lks. S of the corner to sections 2, 3, 10 and 11 from which corner I run

WEST on a TRUE line between sections 3 and 10. Var 14° 19' E.

40 12 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

80 25 The corner to sections 3, 4, 9 and 10.
Land 2nd rate and level with good grass and some Palmetto.

- - - - - - - - - - - - - -

SOUTH between sections 9 and 10. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

48 00 Leave Palmetto.

80 00 Set a post charred, chalked and notched for the corner to sections 9, 10, 15 and 16, and raised a mound with trench and pits per instructions. Land 2nd rate and level with good grass.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 10 and 15. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 27 Intersect N & S. line 5 lks. S of the corner to sections 10, 11, 14 and 15 from which corner I run

WEST on a TRUE line between sections 10 and 15. Var 14° 15' E.

40 13 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.

80 27 The corner to sections 9, 10, 15 and 16.
Land 2nd rate and level, good grass.

- - - - - - - - - - - - - - -

SOUTH between sections 15 and 16. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 15, 16, 21 and 22, and raised a mound with trench and pits as per instructions. Land 2nd rate and level with good grass.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 15 and 22. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 00 Intersect N & S line 20 lks. S of the corner to sections 14, 15, 22 and 23 from which corner I run

WEST on a TRUE line between sections 15 and 22. Var 14° 22' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 The corner to sections 15, 16, 21 and 22.
Land good 2nd rate and slightly rolling, good grass.

- - - - - - - - - - - - - - -

SOUTH between sections 21 and 22. Var. 14° 13' E.

6 00 To hills.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

47 00- Cross road to Fort Tejon, course N. 80° W.

74 00 To scattering timber.

80 00 Set a post charred, chalked and notched for the corner to sections 21, 22, 27 and 28, and raised a mound as instructed from which
A Buckeye 12 in. dia. bears S. 7½° W. 67 lks distant.
Land good 2nd rate and hilly with good grass.
Timber Buckeye and Cedar.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 22 and 27. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

48 00 Leave timber.

80 18 Intersect N & S line 16 lks. S of the corner to sections 22, 23, 26 and 27 from which corner I run

WEST on a TRUE line between sections 22 and 27. Var 14° 20' E.

40 09 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.
A Buckeye 12 ins. dia. bears S. 59½° E. 385 lks.

80 18 The corner to sections 21, 22, 27 and 28.
Land 2nd rate with good grass.

- - - - - - - - - - - - - - -

SOUTH between sections 27 and 28. Var 14° 13' E.

21 00 To foot of mountain, course E & W.

27 80 To solitary rock 10 feet diam. marked thus + I can proceed no further south on account of the rough mountains.

- - - - - - - - - - - - - - -

SOUTH between sections 4 and 5. Var 14° 13' E.

33 00 Leave Palmetto.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as instructed.

80 00 Set a post charred, chalked and notched for the corner to sections 4, 5, 8 and 9 and raised a mound with trench and pits as per instructions. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 4 and 9. Var 14° 13' E.

35 00 To Palmetto.

40 00 Set a post for temporary ¼ section corner.

79 80 Intersect N & S line 22 lks. N of the corner to sections 3, 4, 9 & 10 from which corner I run

WEST on a TRUE line between sections 4 and 9. Var 14° 04' E.

39 90 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

79 80 The corner to sections 4, 5, 8 and 9. Land level and 2nd rate.

- - - - - - - - - - - - - - -

SOUTH between sections 8 and 9. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 8, 9, 16 and 17, and raised a mound with trench and pits as instructed. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 9 and 16. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

79 70 Intersect N & S line 17 lks. N of the corner to sections 9, 10, 15 and 16, from which corner I run

WEST on a TRUE line between sections 9 and 16. Var 14° 16' E.

39 85 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits per instructions.

79 70 The corner to sections 8, 9, 16 and 17.
Land level and good 2nd rate.

- - - - - - - - - - - - - - -

SOUTH between sections 16 and 17. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 16, 17, 20 and 21, and raised a mound with trench and pits as per instructions. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 16 and 21. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 20 Intersect N & S line 28 lks. N of the corner to sections 15, 16, 21 and 22, from which corner I run

WEST on a TRUE line between sections 16 and 21. Var 14° 01' E.

40 10 Set a post charred and chalked for the ½ section corner and raised a mound with trench and pits as instructed.

80 20 The corner to sections 16, 17, 20 and 21. Land level and 1st rate.

- - - - - - - - - - - - - - -

SOUTH between sections 20 and 21. Var 14° 13' E.

32 50 Cross road to Fort Tejon, course N. 80° W.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.

63.00 To hills.

76 00 To mountain and ascend.

80 00 Set a post charred, chalked and notched for the corner to sections 20, 21, 28 and 29, and raised a mound with trench and pits as per instructions.
Land level for the North portion and hilly and mountainous in the South and 1st rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 21 and 28. Var 14° 13' E.

5 00 Leave mountain for rolling ground.

40 00 Set a post for temporary ¼ section corner.

80 30 Intersect N & S line 37 lks. N of the corner to sections 21, 22, 27 and 28, from which corner I run

WEST on a TRUE line between sections 21 and 28. Var 13° 57' E.

40 15 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 30 The corner to sections 20, 21, 28 and 29,
Land 1st rate and very hilly generally.

- - - - - - - - - - - - - - -

I can not survey further South on account of very steep mountains.

- - - - - - - - - - - - - - -

SOUTH between sections 5 and 8. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 5, 6, 7 and 8, and raised a mound with trench and pits per instructions. Land level and 1st rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 5 and 8. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 60 Intersect the N & S line 48 lks. N of the corner to sections 4, 5, 8 and 9, from which corner I run

WEST on a TRUE line between sections 5 and 8. Var 13° 52' E

40 30 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 60 The corner to sections 5, 6, 7 and 8.
Land level open and 1st rate.

- - - - - - - - - - - - - - -

WEST on a RANDOM line between sections 6 and 7. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 47 Intersect the West boundary of the Township 58 lks. S of the corner to sections 6 and 7, from which corner I run

EAST on a TRUE line between sections 6 and 7. Var 13° 48' E.

40 47 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 47 The corner to sections 5, 6, 7 and 8.

- - - - - - - - - - - - - - -

SOUTH between sections 7 and 8. Var 14° 13' E.

23 00 To Palmetto.

33 00 Leave Palmetto grove.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 7, 8, 17 and 18, and raised a mound with trench and pits as instructed. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 8 and 17. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 70 Intersect N 7 S. line 25 lks. N of the corner to sections 8, 9, 16 and 17 from which corner I run

WEST on a TRUE line between sections 8 and 17. Var 14° 12' E.

40 35 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits as per instructions.

80 70 The corner to sections 7, 8, 17 and 18.
Land level and good 2nd rate.

- - - - - - - - - - - - - - -

WEST on a RANDOM line between sections 7 and 18. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 06 Intersect the West boundary of the Township 15 lks. S of the corner to sections 7 and 18, from which corner I run

EAST on a TRUE line between sections 7 and 18. Var 14° 07' E.

40 06 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 06 The corner to sections 7, 8, 17 and 18.
Land level and good 2nd rate.

- - - - - - - - - - - - - - -

SOUTH between sections 17 and 18. Var 14° 13' E.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 00 Set a post charred, chalked and notched for the corner to sections 17, 18, 19 and 20, and raised a mound with trench and pits as per instructions. Land level and good 2nd rate.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 17 and 20. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 60 Intersect N & S. line 40 lks. N of the corner to sections 16, 17, 20 and 21 from which corner I run

WEST on a TRUE line between sections 17 and 20. Var 13° 56'E.

40 30 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 60 The corner to sections 17, 18, 19 and 20.
Land level and good 2nd rate.

- - - - - - - - - - - - - - -

WEST on a RANDOM line between sections 18 and 19. Var 14° 13' E

3 00 To rolling ground.

40 00 Set a post for temporary ¼ section corner.

46 00 Leave undulating for level land.

69 00 To road to Fort Tejon course N. 50° W.

79 88 Intersect the West boundary of the Township 50 lks. S of the corner to sections 18 and 19 from which corner I run

EAST on a TRUE line between sections 18 and 19. Var 13° 52' E.

39 88 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

79 88 The corner to sections 17, 18, 19 and 20.
Land partly rolling and good 2nd rate.

- - - - - - - - - - - - - - -

SOUTH between sections 19 and 20. Var 14° 13' E.

12 50 To road to Fort Tejon bearing N. 70° W.

40 00 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

42 00 To mountains bearing N. 35° W. and ascend the same.

47 50 To a spring of water.

50 00 To Pine and Ash timber.

80 00 I mark a Pine 12 ins. dia. as instructed for the corner to sections 19, 20, 29 and 30 from which
A Pine 18 ins. dia. bears N. 8° W. 278 lks. distant.
Land level on the North portion. The remainder mountainous and 1st rate generally. Timber Pine, Oak and Cedar etc.

- - - - - - - - - - - - - - -

EAST on a RANDOM line between sections 20 and 29. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

58 00 Leave timber.

80 76 Intersect N & S line 40 lks. N of the corner to sections 20, 21, 28 and 29, from which corner I run

WEST on a TRUE line between sections 20 and 29. Var 13° 56' E.

40 38 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 76 The corner to sections 19, 20, 29 and 30.
Land mountainous and 2nd rate generally.

- - - - - - - - - - - - - - -

WEST on a RANDOM line between sections 19 and 30. Var 14° 13' E.

40 00 Set a post for temporary ¼ section corner.

80 30 Intersect the West boundary of the Township 30 lks. S of the corner to sections 19 and 30 from which corner I run

EAST on a TRUE line between sections 19 and 30. Var 14° E.

40 30 Set a post charred and chalked for the ¼ section corner and raised a mound with trench and pits per instructions.

80 30 The corner to sections 19, 20, 29 and 30.
Land 2nd rate and mountainous. Pine, Ash, Cedar etc.

- - - - - - - - - - - - - - -

I can survey no more in this Township on account of steep and rough mountains.

- - - - - - - - - - - - - - -

The land in this Township is adapted to grazing or agriculture. The mountains furnishing timber and water.

- - - - - - - - - - - - - - - -

W. W. Dodd,	Chainman.	Soloman Bratton,	Axeman.
Charles E. Hutton,	do	John Tyler,	do
William Holladay,	Compassman.		

We hereby certify that we assisted Ralph W. Norris, Deputy Surveyor, in surveying the section lines in Townships 10 North and 8 North of the Base Line of Ranges 15 and 16 West of San Bernardino Meridian and that said Townships have been in all respects to the best of our knowledge and belief well and faithfully surveyed and the boundary monuments planted according to the instructions furnished by the Surveyor General.

	W. W. Dodd,	Chainman.
	Charles E. Hutton,	do
(Signed)	Soloman Bratten,	Axeman.
	John Tyler,	do
	Wm. Halladay,	Compassman.

Subscribed by the above named persons
and sworn to before me,
Los Angeles County, California.
December 3rd. 1855.

(Signed) Ralph W. Norris,
Dep. Surveyor.

I, Ralph W. Norris, Deputy Surveyor, do solemnly swear that in pursuance of a contract with John C. Hays, Surveyor of the public lands of the United States in the State of California, bearing date December 23rd. 1854, and in strict compliance with the laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully surveyed the section lines in Township 10 North of Range 15 West, and also the section lines in Township number 8 North of the base line of Range number 16 West, all of the San Bernardino Meridian in the State aforesaid, and do further solemnly swear that the foregoing are the true and original Field notes of such survey.

(Signed) Ralph W. Norris.
Deputy Surveyor.

Subscribed and sworn to
by the said Ralph W. Norris,
before me the 2nd day of
January, A. D. 1856.
(Signed) Gilbert A. Grant.
Notary Public.

- -

The work specified in the foregoing affidavit was executed between November 15th 1855 and November 20th 1855.

(Signed) Ralph W. Norris.
Deputy Surveyor.

- -

RE-SURVEY OF SUBDIVISIONS.

T. 8 N., R. 16 W., S. B. M.

Survey commenced August 7, 1901, and executed with a John Roach Solar Compass, with telescopic attachment.
The instrument was examined, tested on the true meridian at San Francisco, found correct and was approved by the U. S. Surveyor General for California, May 29, 1901.
I examine the adjustments of the instrument and find them correct; and test the solar apparatus on a true meridian determined by observation on Polaris and find it satisfactory.

From the corner of sections 25, 30, 31 and 36 on the E boundary of Township I run
WEST on a RANDOM line between sections 25 and 36.
39 85 To a point 45 lks S of the ¼ section corner.
I find traces of the old mound but no trace of the post could be discovered. Re-establish the corner at the same point as follows:
Set a granite stone 14 x 9 x 9 ins. 10 ins. in the ground for ¼ section corner marked ¼ on N face; and raise a mound of stone covered with earth 4 ft base 2 ft high N of corner.
The true bearing of this half mile is N. 89° 21' W.
From the ¼ section corner I continue on a random line at
79 70 Counting from section corner I arrive at a point 55 lks. S of the corner of sections 25, 26, 35 and 36, already described. Thence I run

S. 89° 13' E. on a TRUE line between sections 25 and 36. Descend.
.40 Cross ravine 16 lks. wide course N. 20° E. Ascend.
2 50 Top of spur bears N. Descend.
18 50 Cross gulch 50 lks. wide 150 ft below spur, course N. 40° E. Ascend.
24 80 Top of spur 100 ft above gulch bears N. Descend.
30 20 Wire fence at base of hill bears N & S.
39 85 The ¼ section corner. Thence I run

S. 89° 21' E. on a TRUE line between sections 25 and 36.
.59 Wire fence bears NE & SW.
1 35 To base of ridge and leave arm of valley bears NE & SW. Ascend rapidly.
4 80 Top of spur 100 feet above valley bears N. Over summit.
9 75 Begin descent of E slope of spur.
14 80 Cross gulch 30 lks. wide 100 ft below spur, course N. Ascend.
30 75 Spur bears N. Descend.
32 30 Cross gulch 10 lks. wide course N. Ascend.
33 75 Top of spur bears N. Descend.
37 35 To base of spur and descend gradually to
39 85 The corner of sections 25, 30, 31 and 36.
Land mountainous. Soil 2nd rate. No timber.
Mountainous land 68.70 chs. Valley land 11.00 chs. August 7, 1901.

- - - - - - - - - - - - - - -

I re-run the East and North boundaries of section 26 in order to locate error in closing of line around said section as instructed.
August 9, at 7h 25m A M., l.m.t. I set off 34° 44' on the Lat arc; 15° 58.5'on the Decl. arc, and determine a true meridian with the solar at the corner of sections 25, 26, 35 and 36. Thence I run

NORTH on a RANDOM line between sections 25 and 26.
40 04 To a point 16 lks. W of old ¼ section corner.
Here I find traces of mound but no trace of the corner post could be discovered.
Re-establish the corner at the same point as follows:
Set a granite stone 14 x 6 x 6 ins. 10 ins. in the ground for ¼ section corner, marked ¼ on W face, and raise a mound of stone covered with earth 4 ft base 2½ ft high W of corner. The true bearing of this half mile is N. 0° 14' E.
From ¼ section corner I continue

NORTH on a RANDOM line between sections 25 and 26.

80 04 To corner of sections 23, 24, 25 and 26. Here I find trace of old mound, the post being entirely obliterated.
Re-establish the corner at the same point as follows:
Set a granite stone 16 x 8 x 6 ins. 12 ins. in the ground for corner of sections 23, 24, 25 and 26, marked with 2 notches on S and 1 notch on E edges and raise a mound of stone covered with earth 4 ft base 2 ft high W of corner. Thence I run

SOUTH on a TRUE line between sections 25 and 26. Ascend gradually.

6 75 Cross old road leading from Los Angeles to Fort Tejon, bears N. 75° W. and S. 75° E.

32 00 Cross east end of small hill bearing E & W.

33 75 Cross road leading from Tim Blanchard's Ranch to Antelope Valley, bears NE & SW.

35 40 Wire fence bears E & W.

40 00 The ¼ section corner. Thence I run

S. 0° 14' W. on a TRUE line between sections 25 and 26.

2 00 Enter dry wash course N. 60° E.

3 60 Leave dry wash at base of spur. Ascend abruptly.

3 75 Road bears N. 70° E and S. 70° W.

7 00 Top of spur 100 ft above wash bears NW. Descend along W slope of ridge.

11 70 Cross road bears NW & SE.

15 00 Cross dry wash 20 lks. wide course NW and ascend.

15 67 Cross same road bears NE & SW.

33 50 Top of spur 300 ft above dry wash, bears NE. Descend rapidly to

40 04 The corner of sections 25, 26, 35 and 36.
Land rolling and mountainous. Soil 2nd rate. No timber.
Mountainous 48.04 chs. and Rolling land 32 chs.

- - - - - - - - - - - - - -

From the corner of sections 23, 24, 25 and 26 I run
WEST on a RANDOM line between sections 23 and 26.

40 00 Being unable to find ¼ section corner I set temporary ¼ section corner.

79 92 To a point 37 lks. S of the corner of sections 22 and 23 already described. Thence I run
S. 89° 44' E. on a TRUE line between sections 23 and 26.
Over rolling ground falling rapidly to the N.

4 94 Wire fence bears N & S.

23 00 Wire fence bears N & S. Enter Almond Orchard.

39 96 Set a granite stone 14 x 6 x 6 ins. 10 ins. in the ground for ¼ section corner marked ¼ on N face and raise a mound of stone 3 ft base 1½ ft high N of corner.

41 00 Leave orchard bears N & S.

41 70 Cross top of low shedd bears N about 20 ft and S 60 ft.

42 50 E. W. Edson's dwelling house bears N about 4 chs distant.

44 50 Enter Orchard bears N & S.

56 00 Leave Orchard bears N & S.

~~64 xx~~ ~~Cross xxxxxxxxxxxxxxxx.~~

64 34 Wire fence bears N & S.

64 42 Cross road bears N & S.

79 92 The corner of sections 23, 24, 25 and 26.
Land rolling. Soil 1st rate. No timber. Rolling land 79.92 chs.

August 9, 1901.

- - - - - - - - - - - - - -

I re-run the North boundary of section 27 in order to locate closing error.
August 12, At the corner of sections 22 and 23 I set off 15° 1.5' on the Decl arc and at 0h. 4m. 56s. P.M., l.m.t., observe the sun on the meridian, the resulting Lat is 34° 45' Thence I run

WEST on a RANDOM line on S boundary of section22.

40 47 To a point 12 lks. S of point for ¼ section corner.
I find the old ¼ section corner is entirely obliterated, but I find the stump of the buckeye witness tree described by Deputy Norris, which in the field notes furnished me, is described to stand from the old corner S. 59½° E. 3,85 chs. distant.
The tree has been cut down, leaving a stump about 15 ins. above ground, said stump is 18 ins. dia. and marked ¼ S BT.

I re-establish the corner from the stump accordingly.
Set a granite stone 16 x 10 x 5 ins. 12 ins in the ground for ¼ section corner, marked ¼ on N face, dig pits 18 x 18 x 12 ins. E & W of stone 4 ft distant, and raise a mound of earth 4 ft base 1½ ft high N of corner.
The bearing of line to this ¼ section corner is N. 89° 50' W.
From ¼ section corner I continue
WEST on a RANDOM line on S boundary section 22.

80 52 Intersect the corner of sections 21, 22, 27 and 28.
I find traces of old mound here only, the post being missing.
Re-establish the corner at the same point as follows:
Set a granite stone 16 x 8 x 5 ins. 12 ins. in the ground for corner of sections 21, 22, 27 and 28, marked with 2 notches on S and 3 notches on E edges, and raise a mound of stone covered with earth 4 ft base 1½ ft high W of corner. Thence I run

EAST on a TRUE line on S boundary of section 22. Descend gradually.

4 60 Cross dry wash 20 lks. wide course N.
4 80 Foot of bluff bank bears N & S. Ascend abruptly.
5 25 Top of bank and ascend more gradual.
8 00 Top of spur 40 ft above wash, bears N. Descend.
14 50 Cross gulch 30 lks. wide, 30 ft below spur course N. 20° E. Ascend rapidly.
18 00 Top of ascent bears N & S. 50 ft above gulch. Descend.
39 00 Enter bottom bears N. 60° E. and S. 60° W. Descend gradually.
40 05 The ¼ section corner. Thence I run
S. 89° 50' E. on a TRUE line on S boundary section 22.
3 30 Road bears N & S.
5 80 Leave bottom bears NE & SW. Ascend.
7 00 Top of ascent bears NE & SW. Descend.
9 75 A dwelling house bears S. 10° W. about 16 chs. distant.
40 47 The corner of sections 22 and 23.
Land rolling and mountainous. Soil 2nd rate. No timber.
Mountainous land 38 chs and Rolling ground 41.52 chs.

August 12, 1901.

- - - - - - - - - - - - - - -

I re-run the line between sections 21 and 28 in order to locate closing error of lines around section 28.
Finding the old corner of sections 20, 21, 28 and 29, a stone mound without post or marked stone, I re-establish the corner as follows;
Set a granite stone 20 x 15 x 8 ins. in a mound of stone 4 ft base 2 ft high for corner of sections 2- and 21, marked with 4 notches on E edge and raise a mound of stone 4 ft base 2 ft high W of corner.
Impracticable to sink stone or dig pits.
NOTE:- I set corner for sections 20 and 21 only, as a closing corner for sections 28 and 29 will be necessary. Thence I run

EAST on a RANDOM line on S boundary section 21.

40 27 To a point 20 lks. N of the ¼ section corner which is a stone pile 2 ft base 1 ft high. I failed to discover any trace of post.
Re-establish the corner at the same place as follows;
Set a granite stone 15 x 10 x 6 ins. 10 ins. in the ground for ¼ section corner, marked ¼ on N face, and raise a mound of stone covered with earth 4 ft base 1½ ft high S of corner.
NOTE: I place mound S of corner here, owing to the steepness of the ground.
From ¼ section corner I continue
EAST on RANDOM line on S boundary Section 21.

80 95 Counting from section corner to a point 29 lks. N of corner of sections 21, 22, 28 and 29.
August 14, At this corner I set off 14° 25' on the Decl arc and at 0 h 4 m 36 s. P M., l.m.t., observe the sun on the meridian; the resulting Lat. is 34° 45.5' nearly. Thence I run

N. 89° 35' W. on a TRUE line on S boundary section 21.
Over rolling and broken ground falling to the N.
40 68 The ¼ section corner already described.
Corner on S bluff of mesa.
71 00 Road leading from Spenser's Ranch to County road bears N & S.
73 00 Cross gulch 20 lks. wide course N.
80 05 The point for closing corner of sections 28 and 29
80 95 The corner of sections 20 and 21.
Land rolling and mountainous. Soil 2nd rate. No timber.
Rolling and mountainous land. Mountainous land 7.95 chs.
Rolling land 73 chs. August 14, 1901.

I re-run the North half of line between sections 29 and 30 and the line between sections 20 and 29 in order to locate closing error.
From corner No. 7 of the La Liebre Rancho, already described, I run NORTH on a RANDOM line between sections 29 and 30, on W boundary of Rancho La Liebre.
42 00 To a point 3.71 chs E of corner of sections 19, 20, 29 and 30, which is a pine tree 18 ins. dia. marked T 8 N S 20 on NE.
R 16 E, S 29 on SE
S 30 on SW and
S 19 on NW sides, from which a
Pine 2½ ft dia. bears N. 8° W. 274 lks. distant.
marks partly covered by new growth. I mark a
Pine 5 ins. dia. bearing N. 60° E. 10 lks distant,
T 8 N, R 16 W S 20 BT. Thence I run
S. 5° 3' E. on a TRUE line between sections 29 and 30.
Through scattering clump of brush. Ascend.
5 00 Top of ridge 60 ft above corner bears E & W. Descend.
9 50 Enter canyon, course E.
11 06 Leave canyon, ascend rapidly.
22 10 Top of ridge 200 ft above canyon, bears E & W. Descend.
36 75 Enter canada, course E.
42 16 Corner No. 7 of the Rancho La Liebre.
Land mountainous. Soil 2nd rate. Timber, a few scattering scrub Pine in gulches. Undergrowth, scattering clumps of dense chaparral.
Mountainous land 42.16 chs.

From Pine tree corner of sections 19, 20, 29 and 30, I run EAST on a RANDOM line between sections 20 and 29.

40 00 Being unable to find any trace of ¼ section corner I set temporary ¼ section corner.
August 16, At this temporary ¼ section corner I set off 13° 48' on the Decl arc and at 0 h 4 m 13 s P M., l.m.t., observe the sun on the meridian, the resulting Lat is 34° 45'
80 95 To a point 58 lks. N of the corner of sections 20 and 21.
Thence I run
N. 89° 35' W. on a TRUE line between sections 20 and 29.
Over broken N slope of mountain. Descend.
.10 Cross gully 2 ft deep 8 lks wide, course N.
2 10 Cross gulch 20 lks wide, 20 ft below section corner, course N.
6 30 Cross gulch 6 lks. wide, course N. Ascend.
11 45 Wire fence bears N & S.
20 40 Cross point of spur bears N 80 ft above last gulch. Descend.
25 35 Base of spur and enter bottom bears NE & SW.
36 75 Wire fence bears N & S.
37 05 Road leading to Antelope Valley bears N & S.
37 35 Wire fence bears N & S.
40 47½ Set a sandstone 16 x 10 x 6 ins. 14 ins. in the ground for ¼ section corner marked ¼ on N face, dig pits 18 x 18 x 12 ins E & W of stone 4 ft dist and raise a mound of earth 3½ ft base 1½ ft high N of corner.
46 30 Enter dry wash, course N.
47 35 Leave dry wash. Ascend.
64 25 To base of ridge bears NE & SW. Ascend abruptly.
72 40 Top of ridge bears N & S. Descend W slope. Enter heavy brush N & S.
74 35 Leave heavy brush. Enter scattering Pine timber bears NW & SE.

75 20 Cross head of gulch 10 lks. wide, course NW. Ascend.
79 10 Cross Rancho La Liebre fence line bears N & S.
80 95 The corner of sections 19, 20, 29 and 30.
Land mountainous. Soil 2nd rate.
Timber, 6.60 chs. scattering scrub pine.
Undergrowth 1.95 chs dense chaparral.
Mountainous land 58.95 chs. Bottom land 22 chs.

August 16, 1901.

I re-run the line between sections 19 and 30 in order to locate closing error.
August 21, At 8 h 20 m A.M., l.m.t., I set off 34° 45' on the Lat arc, 12° 14' on the Decl arc, and determine a true meridian with the solar at the corner of sections 19, 20, 29 and 30.
Thence I run
WEST on a RANDOM line between sections 19 and 30.
40 30 To ¼ section corner. Which is an oak 16 ins. dia. marked ¼ S on W face, from which an
Oak 16 ins. dia. bears S. 58° 35' W. 90 lks. distant marked ¼ S BT.
80 60 Intersect the W boundary of the Township 8 lks. S of the corner of sections 19, 24. 25 and 30 previously described.
Thence I run
S. 89° 53' E. on a TRUE line between sections 19 and 30.
Ascend gradually.
4 35 To base of ridge bears N & S. Ascend rapidly.
18 60 Top of spur bears N & S. Descend.
33 35 Bottom of depression bears N & S.
Enter heavy brush. Ascend.
38 60 Top of spur 200 ft above depression bears N. Descend.
40 30 The ¼ section corner. Thence I run

EAST on a TRUE line between sections 19 and 30.
1 90 Cross gulch 30 lks. wide course N. Ascend.
7 30 Top of spur bears N. Descend.
12 80 Cross gulch 50 lks. wide course NE. 100 ft below spur. Ascend.
19 30 Top of ridge 150 feet above gulch bears N & S. Descend.
39 00 Leave brush bears N & S.
40 30 The corner of sections 19, 20, 29 and 30.
Land, rough mountains. Soil 3rd rate.
Timber, a few scattering scrub Pine and Oak in gulches.
Undergrowth 40.95 chs of heavy chaparral.
Mountainous land 80 60 chs.

August 21, 1901.

George W. Pearson,

U. S. Deputy Surveyor.